



City of Prince Albert

Public Works Department
1084 Central Avenue
Prince Albert, SK S6V 7P3
Phone: (306) 953-4884
Fax: (306) 953-4915



April 27th, 2026

RE: 2026 Watermain & Road Rehabilitation 9th Street East (4 - 6 Avenue) & 4th Avenue East (8 - 10 Street)

The City of Prince Albert Public Works Department would like to advise businesses and residents that 9th Street East (4 – 6 Avenue) and 4th Avenue East (8 - 10 Street) is scheduled for a Capital Utility & Paving Project during the 2026 Construction season.

Watermain Rehabilitation:

The scope of the project includes the relining of 545 meters (Highlighted in **Red**) of 150mm diameter Cast Iron Watermain (installed between 1900 – 1912) with a structural liner, bringing the main to a like new condition without the need to excavate the roadway along the entirety of the pipe length. As a result, no tree removals are anticipated during this project.

In conjunction with watermain relining, the intersection of 9th Street East and 4th Avenue will be conventionally excavated and a new PVC watermain will be installed (Highlighted in **Green**).

The watermain rehabilitation portion of this project will take approximately 5 weeks to complete (weather pending). Above ground water will be provided to all property owners at times when water cannot be provided through the watermain. During this time a drinking water advisory will be in effect. Properties that will be impacted by this portion of the work are Outlined in **Blue**. Drinking water advisories may be in effect for up to 7 weeks.

Access pits (Outlined in **Red**) will result in temporary restrictions to driveway access, on-street parking, and traffic movement in select areas during construction. The intersection of 4th Avenue East and 9th Street East will be closed to traffic while conventional excavation and watermain replacement work is underway.

Later in the season, approximately 468 meters of 200mm diameter Vitrified Clay Sanitary Main (installed in 1911) is tentatively scheduled to be relined with a Cured-in-place-pipe liner. This process is trenchless and will have limited impact to residents.

Road Rehabilitation:


Upon completion of the watermain relining and watermain replacement, roadway rehabilitation will take place. This includes asphalt milling, paving and select concrete repairs. A notice will be provided to residents in the coming weeks to present further details regarding the roadway rehabilitation portion of this project.

A follow up letter will be provided two weeks prior to construction to provide additional details on the project, scheduling and construction zones. For a list of projects identified for paving and utility replacements, please visit www.citypa.ca/capital-projects/

If you require further information with respect to this matter, please do not hesitate to contact Public Works at (306) 953-4884.

Yours truly,

Evan Hastings, P. Eng
Capital Projects Manager

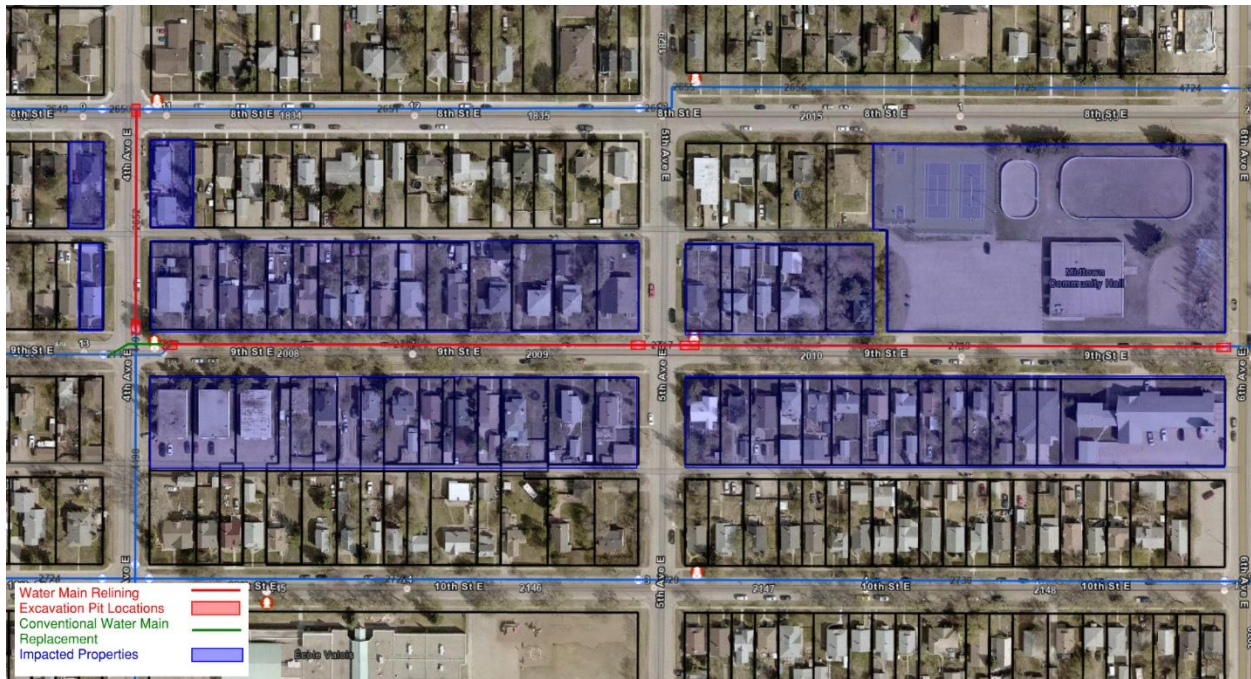

IMPORTANT NOTICE